

The Thermo Scientific TX10 transit time flowmeter provides superior performance under the most demanding conditions. It features non-intrusive, clamp-on transducers that ensure leak-free measurement with zero pressure drop and install without flow interruption to eliminate downtime.

## Thermo Scientific TX10

### Time Transit Flowmeter



#### Features

- 9,000-point data logger
- Velocity range of  $\pm 0$  to 40 ft/s ( $\pm 0$  to 12 m/s)
- Two-line, 20-character, high-resolution, backlit LCD
- RS232 digital communication interface
- Easy-to-install, clamp-on design
- Bi-directional flow measurement
- Thermo Scientific UltraScan interface software
- Set of standard transducers



The Thermo Scientific TX10 transit time flowmeter combines digital signal processing (DSP) with advanced digital correlation techniques to accurately measure flow variables, including velocity, flow rate and volumetric flow. This flexible instrument is an economical alternative to magnetic, vortex and differential pressure flow transmitters. Principally designed for clean liquid applications, the TX10 is tolerant of liquids with higher concentrations of gas bubbles or entrained solids than other transit time flowmeters. The non-intrusive, clamp-on transducers can be installed without flow interruption and ensure leak-free measurement with zero pressure drop.

The TX10 is housed in a rugged NEMA 4X enclosure and features a two-line, 20-character, high resolution, backlit LCD display for excellent visibility even in poorly lit conditions. Outputs include a 12-bit digital, optically-isolated, 4-20 mA analog signal and a Modbus communications port.

Programming of the flowmeter is simple and can be accomplished in minutes with Thermo Scientific UltraScan software, a Microsoft® Windows®-compatible configuration and signal analysis program. It features easy-to-use, pull-down menus and provides access to an extensive range of diagnostics information to quickly determine the quality and accuracy of the flow measurement.

#### "Hot Tap" Insertion Transducers

Ideal for water and wastewater applications, Thermo Scientific insertion transducers install easily on concrete pipes, heavily corroded steel pipes and pipes with considerable calcium buildup, using the standard "Hot Tap" process. Wetted materials include a brass seal housing, a stainless steel insertion stem and an Ultem® transducer facing. A double "O"-ring seal mechanism prevents leakage during insertion and extraction as well as during normal operation for optimal performance.

#### Applications

- HVAC
- Ultrapure liquids
- Potable water
- Liquefied gases
- Petroleum products
- Water and wastewater management

## Thermo Scientific TX10

### Performance Specifications

Velocity Range	±0 to 15 m/s (±0 to 50 ft/s)
Accuracy	±1% of velocity or ±0.03 m/s (±0.1 ft/sec)
Pipe Size	25 mm to 5 m (1 in to 200 in)

### Functional Specifications

Outputs	4-20 mA (into 1K to 5K Ohms), 12-bit, 5kV, opto-isolated; Loop or self-powered; Modbus; additional relay (optional)
Power Supply	85-265 VAC, 50/60 Hz (standard) 100-240 VAC, 50/60 Hz (FM certified) 10-32 VDC (optional)
Temperature Range	Standard transducers: process temperature, -40°C to +100°C (-40°F to +212°F) High temperature transducers: process temperature, -40°C to +200°C (-40°F to +392°F) Transmitters: ambient temperature, -20°C to +55°C (-4°F to +131°F)
Display	Two-line, 20-character, high-resolution, backlit LCD indicating flow rate, signal strength, total and other selectable parameters


### Physical Specifications

Transmitter	NEMA 4X (IP65), flame retardant, fiberglass-reinforced polyester
Transducers	Two encapsulated transducers; 30 ft. (9m) standard cable length
Weight (approx.)	3.2kg (7 lb) without options

### Compliance

CSA	Class I, Div 1, Groups C & D; Class I, Div 2, Groups A, B, C & D; Class II, Div 1, Groups E, F & G (intrinsically safe barriers installed in transmitter); Class II, Div 2, Groups E, F & G
ATEX	Zone 2 (LCIE 03 ATEX 6539); Available with standard transducer configuration only

### Ordering Information

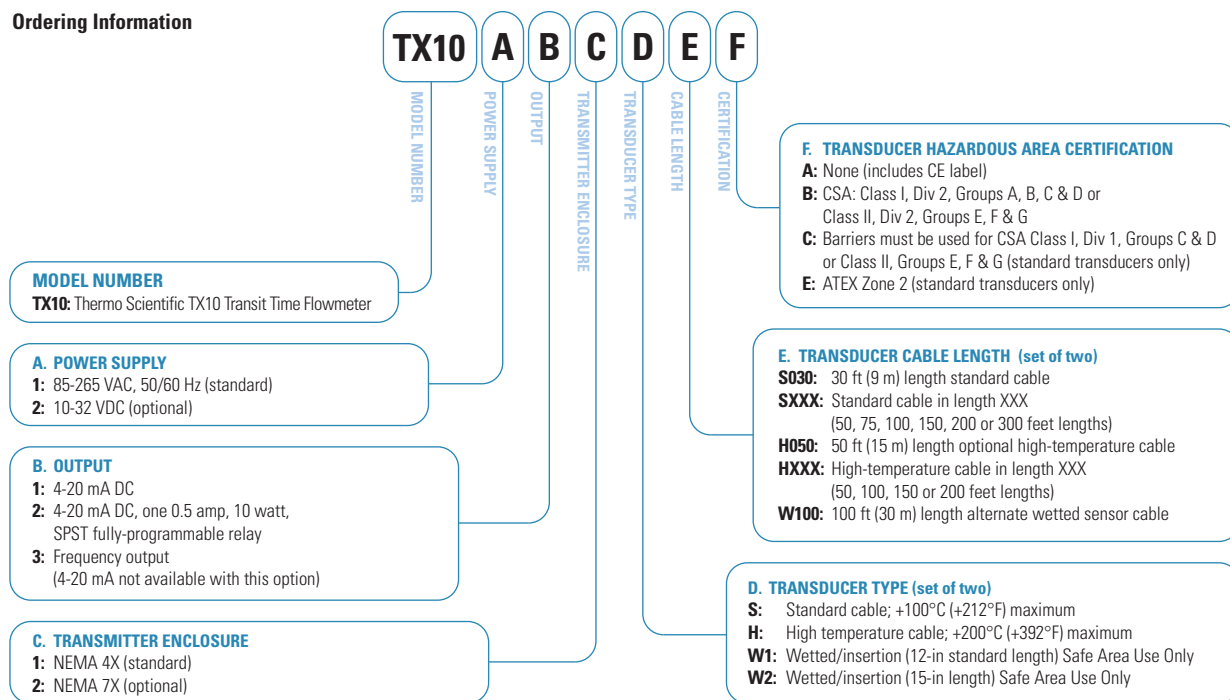

© 2008 Thermo Fisher Scientific Inc. All rights reserved. Windows and Microsoft are registered trademarks of Microsoft Corporation in the United States and/or other countries. Utlem is a registered trademark of the General Electric Company. Results may vary under different operating conditions. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representatives for details. Literature Code PI.2054.0408

Room 1010 - 1019  
Ping'an Mansion No. 23 Jinrong Street  
Xicheng Dist, Beijing 100032 CHINA  
  
A-101, ICC Trade Tower, Senapati Bapat Road  
Pune 411016 Maharashtra, INDIA  
  
Ion Path, Road Three, Winsford  
Cheshire CW7 3GA UNITED KINGDOM  
  
1410 Gillingham Lane  
Sugar Land, TX 77478 USA

+86 (10) 5850-3588  
+86 (10) 6621-0847 fax  
  
+91 (20) 6626 7000  
+91 (20) 6626 7001 fax  
  
+44 (0) 1606 548700  
+44 (0) 1606 548711 fax  
  
+1 (800) 437-7979  
+1 (713) 272-0404  
+1 (713) 272-4573 fax

[www.thermo.com](http://www.thermo.com)

**Thermo**  
SCIENTIFIC